MODEL

ESD EC 302 Plus

Safety boot EN ISO 20345:2011 S1 SRC

FEATURES

Sizes: 225 - 315 (36 - 48/49)

Fitting Options: NB, XB (S, XXB)

+ Soft nubuck leather
+ Perforated design for optimal ventilation
+ Reflective applications
+ Aluminium toe cap
+ Breathable functional lining
+ Leather insole
+ Full-length, removable insole ERGO-COOL® ESD with excellent moisture transportation for optimal climate comfort

OUTSOLE

TPU VX ESD, silver-grey

+ 3,0 mm profile
+ Flexion zone with pivot point
+ Broad contact surface
+ Best possible scuff resistance and anti-slip properties
+ Heat-resistant up to approx. 120° C

(Sizes 36-38 with outsole TPU Balance ESD)

CUSHIONING

SECURA VARIO®-System

The honeycomb structure that forms the SECURA VARIO® module, is fitted according to the individual wearer's weight. This enables the pressure applied to the heel to be absorbed and reduced, relative to the wearer, relieving the back.

Individual heel shock absorption

above 91 kg
up to 91 kg
up to 79 kg
up to 57 kg

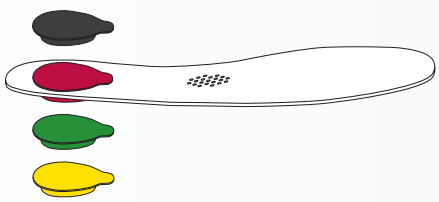

Certified and recommended by Association Forum Healthy Back – Better Living and Federal Association of German Back Schools.

More information:
AGR e.V. · Postbox 103 · 27443 Selsingen
Tel. 04284 92 69 990· www.agr-ev.de

KEY

- Multi-zone shock absorption VARIO Vitality®
- Weight calculated heel shock absorption VARIO®
- SECURA CARE heel cushioning
- STEITZ Flex-Zone
- STEITZ fitting system
- ESD - electrostatic discharge equipped
- Aluminium toe cap
- Steel toe cap
- Puncture-resistant steel midsole
- Flexible, textile puncture protection SECURA FLEX
- Fireman's boot conforming to EN 15090:2012
- Warm winter lining
- Cut protection tested to EN ISO 17249:2007
- Certified for german foot/insole treatment
- GORE-TEX®-membrane, waterproof and breathable

STEITZ SECURA

We reserve the right to make any technical alterations.Fringe sizes are equipped with anouter sole varying to that pictured.